





1) Lock cut-out on aluminium profile

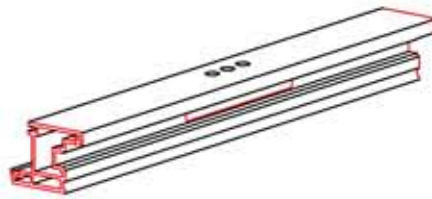

2) Cut-out for handle and its mechanism on steel reinforced pvc

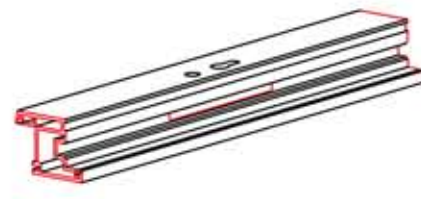


3) Lock cut-out on pvc profile

Copy router for aluminium and pvc profiles

With a manual vertical milling unit (A21LS-New) and a horizontal drilling unit with manual feed (A24LS-New).
Conceived to carry out the milling with the vertical unit (A21LS-New) and the triple drilling with the horizontal unit on aluminium and steel reinforced pvc for the inserting of a window handle with just one clamping without turning the profile (A24LS-New).
A wide range of working operations can be carried out with the vertical milling unit (see working examples on the reverse).



Optional equipment


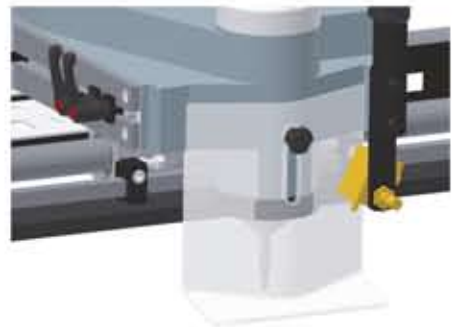


Coolant mist-sprayer needed to work aluminium (Optional for A24LSNew)




Optional Lateral Supports for left and Right Side of Machine in 1M, 2M or 2.5M (Only for A21 LS New)

CE

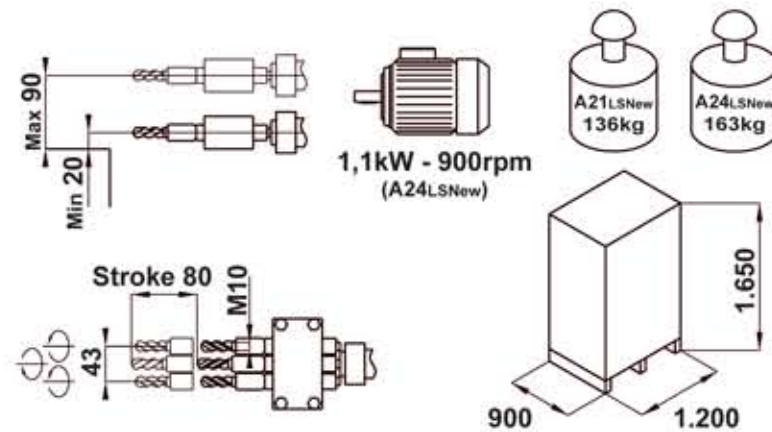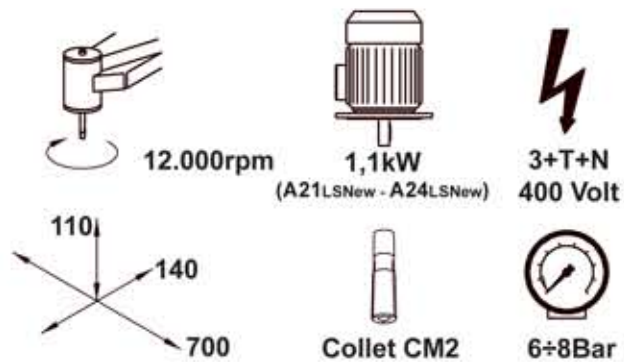

The Company reserves the right to amend and improve its products without notice.

Code 104241S
(104241+502400+502411)

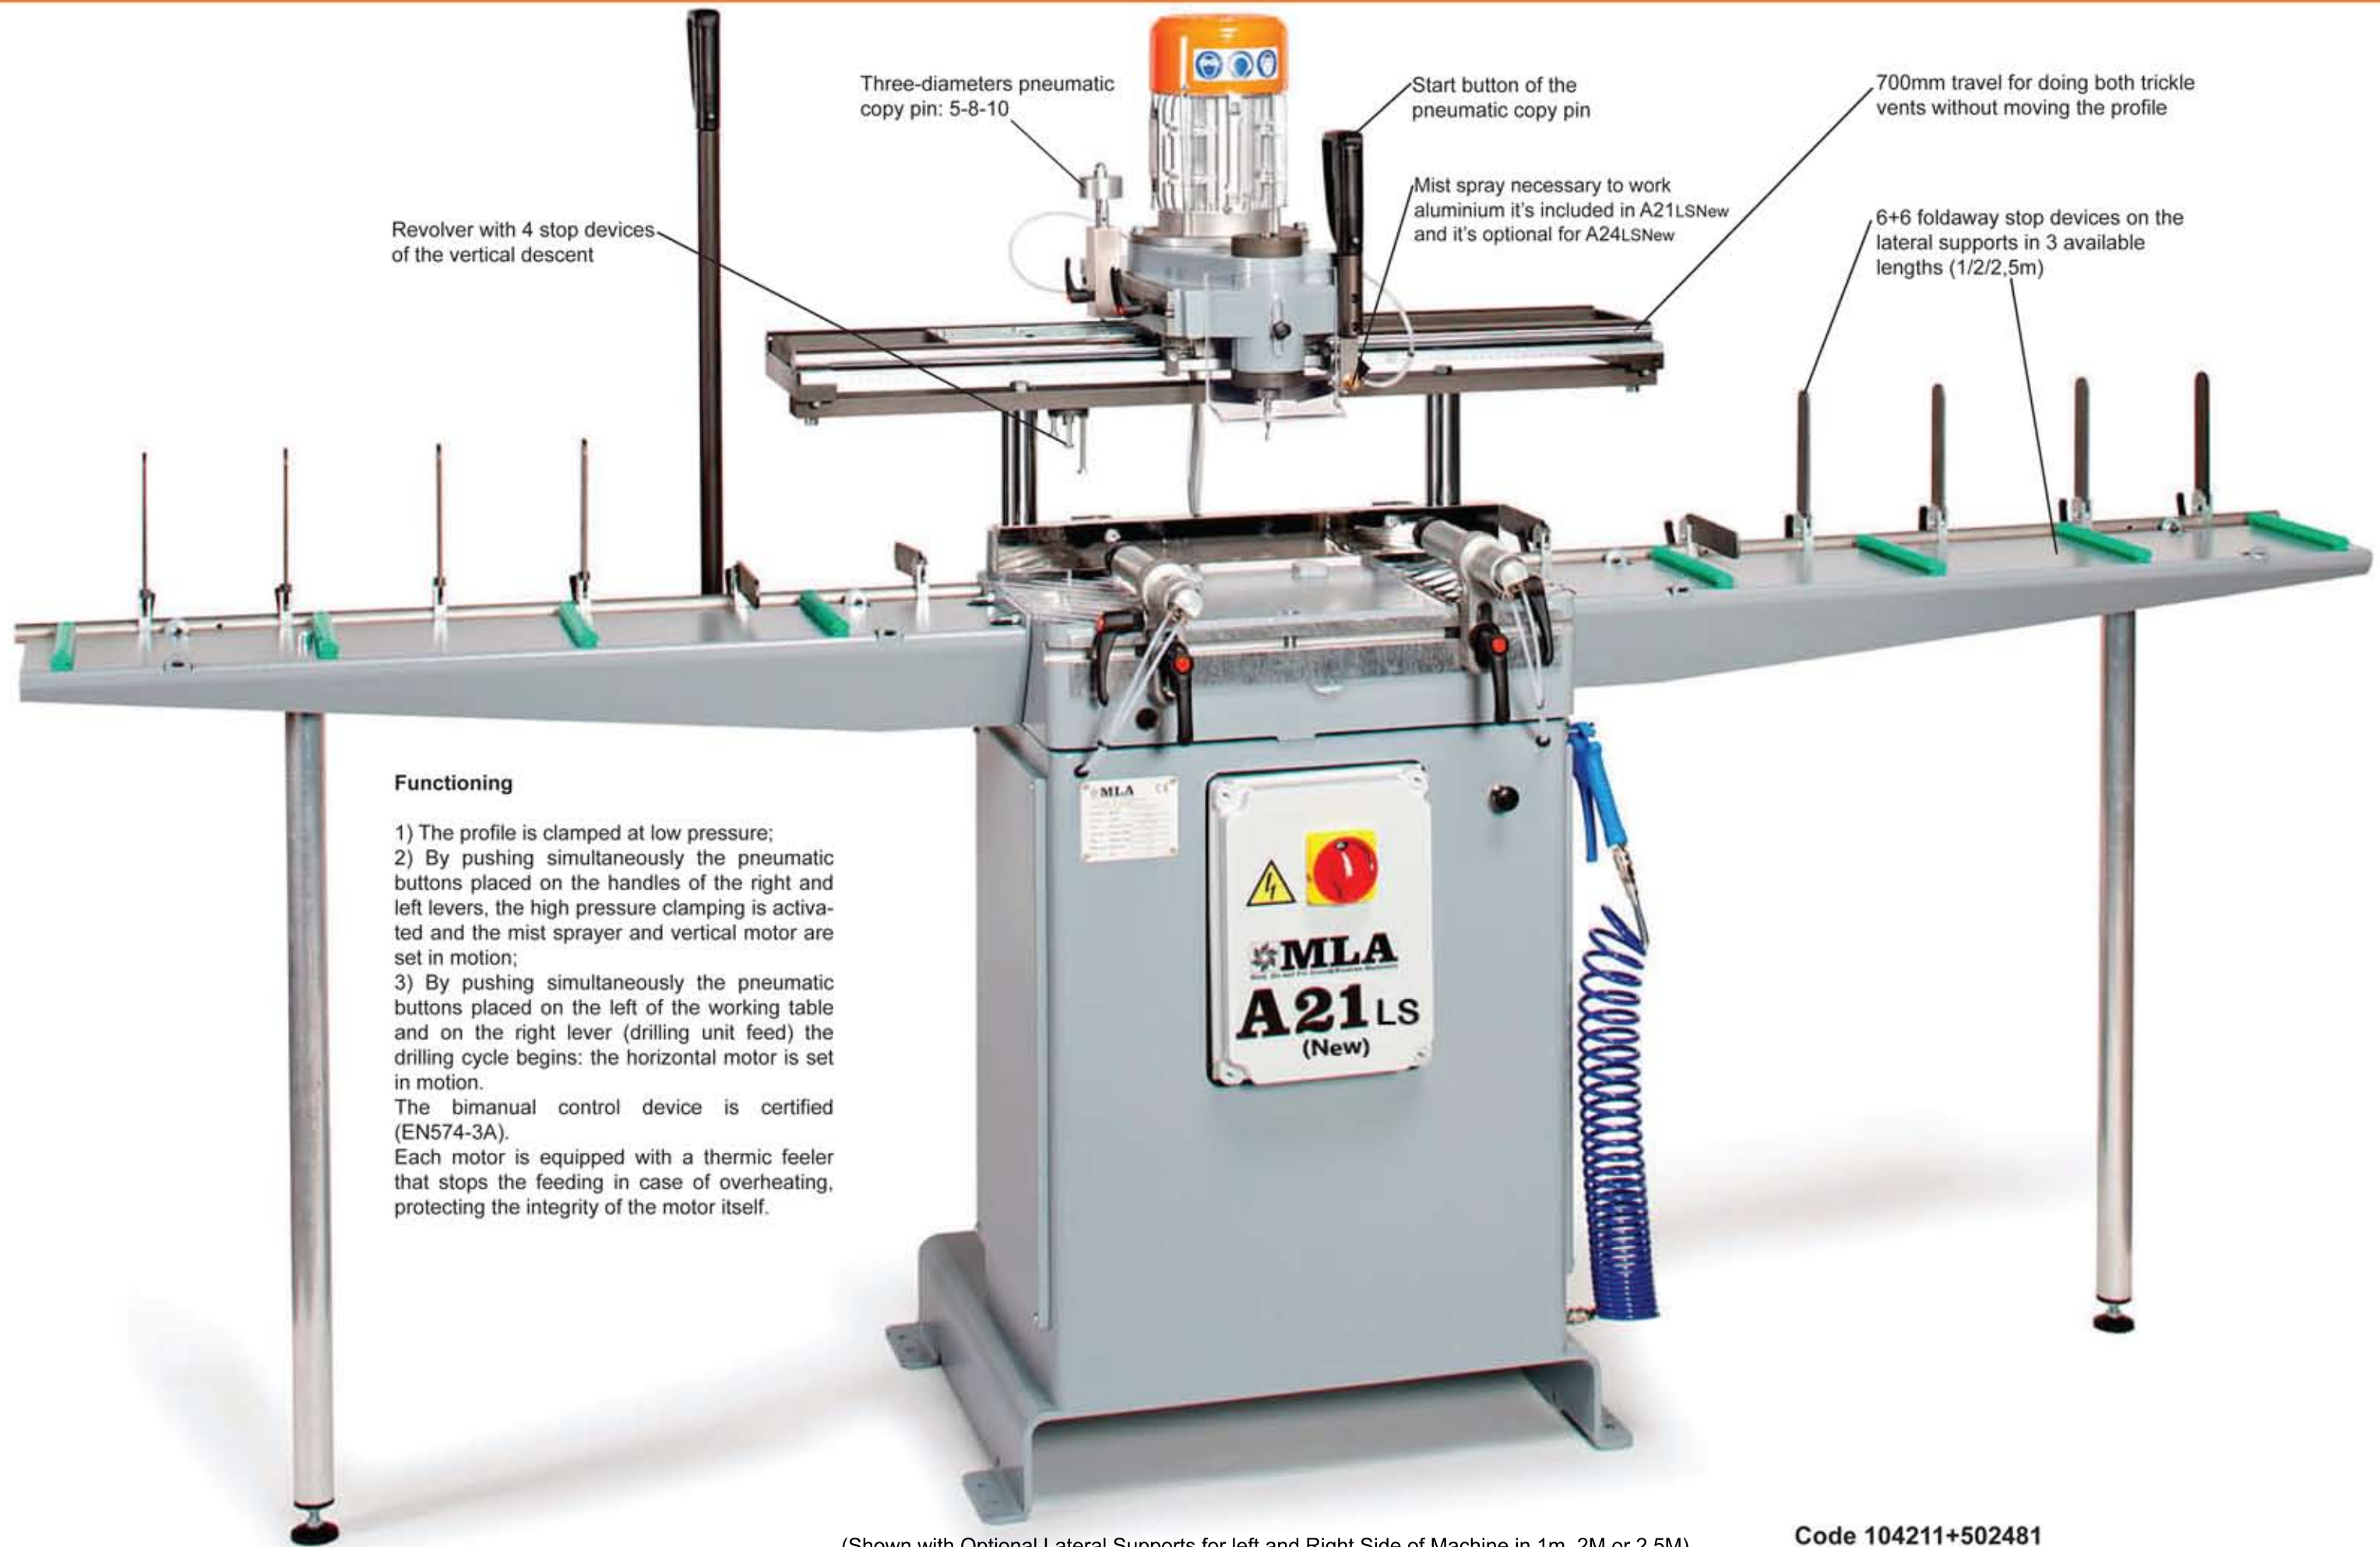

Three-diameters pneumatic copy pin: 5-8-10

Start button of the pneumatic copy pin

700mm travel for doing both trickle vents without moving the profile

Revolver with 4 stop devices of the vertical descent

Mist spray necessary to work aluminium it's included in A21LSNew and it's optional for A24LSNew

6+6 foldaway stop devices on the lateral supports in 3 available lengths (1/2/2,5m)

Functioning

- 1) The profile is clamped at low pressure;
 - 2) By pushing simultaneously the pneumatic buttons placed on the handles of the right and left levers, the high pressure clamping is activated and the mist sprayer and vertical motor are set in motion;
 - 3) By pushing simultaneously the pneumatic buttons placed on the left of the working table and on the right lever (drilling unit feed) the drilling cycle begins: the horizontal motor is set in motion.
- The bimanual control device is certified (EN574-3A).
 Each motor is equipped with a thermic feeler that stops the feeding in case of overheating, protecting the integrity of the motor itself.



(Shown with Optional Lateral Supports for left and Right Side of Machine in 1m, 2M or 2.5M)

Code 104211+502481