


Semiautomatic milling drilling machine for pvc profiles



MP30S + lateral supports l=2m with 6+6 stops on millimetre rod code 502549

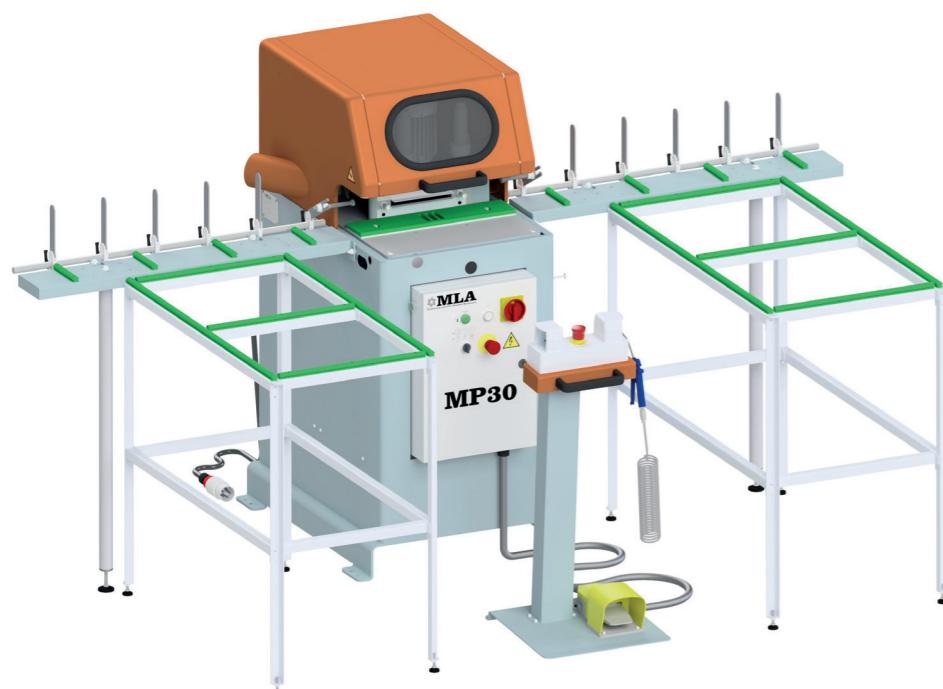

MP30

- + lateral supports l=1m with 6+6 stops on millimetre rod code 502491
- + supports for welded window code 502594
- + control desk to activate the machining on welded window code 502595




MP30S + 502491

CE

MP30 is conceived to carry out the slot and the triple drilling for the window handle insertion on aluminium and pvc profiles with steel stiffener (drilling only).

The comfortable front opening enables an easy positioning of the profile, which is visible through the scratch-resistant polycarbonate window: this solution allows the operator to check the working operation in full safety.

On MP30 it is possible to use both symmetric centring device and profile lateral supports at the same time.

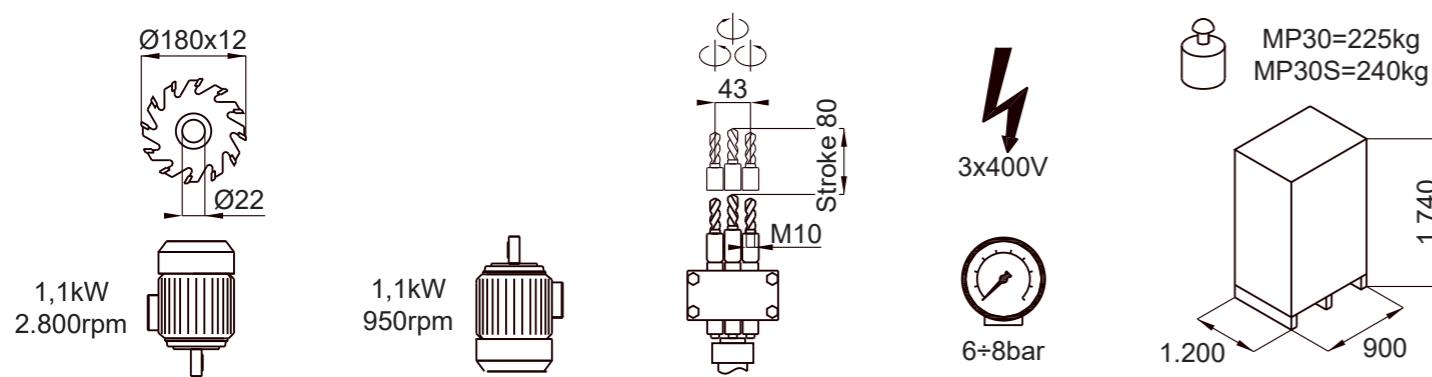


The Company reserves the right to amend and improve its products without notice.

MP30 code 105302

MP30S code 105302S = MP30 + symmetric centring device code 502548

Optional for both:

- + (2+2) stops on millimetre rod code 502588
- + (6+6) stops on millimetre rod code 502589
- + lateral supports l=1m with 6+6 stops on millimetre rod code 502491
- + lateral supports l=2m with 6+6 stops on millimetre rod code 502549

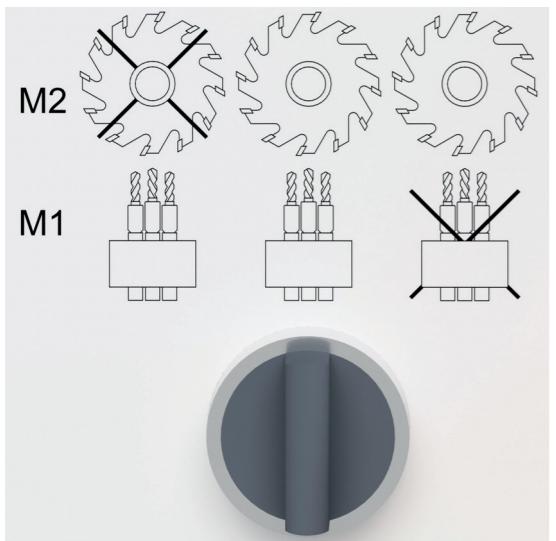

Functioning

The profile clamping takes place by pressing the pedal activating the short stroke clamp cylinders.

The working cycle is set in motion by pushing the buttons on the right and left side of the electric board simultaneously (certified bimanual device EN574-3A).

At the end of the working cycle, the profile is unclamped automatically.

It is possible to select the complete working cycle or the milling or drilling cycle only.


Each motor is equipped with a thermic feeler that stops the feeding in case of overheating, protecting the integrity of the motor itself.



The milling depth can be selected by using 6 stops displayed as a star on the revolver.

The horizontal milling motor is equipped with servo brakes that guarantee the tool immediate stoppage.

The drilling unit is equipped with a oil-pneumatic drive.

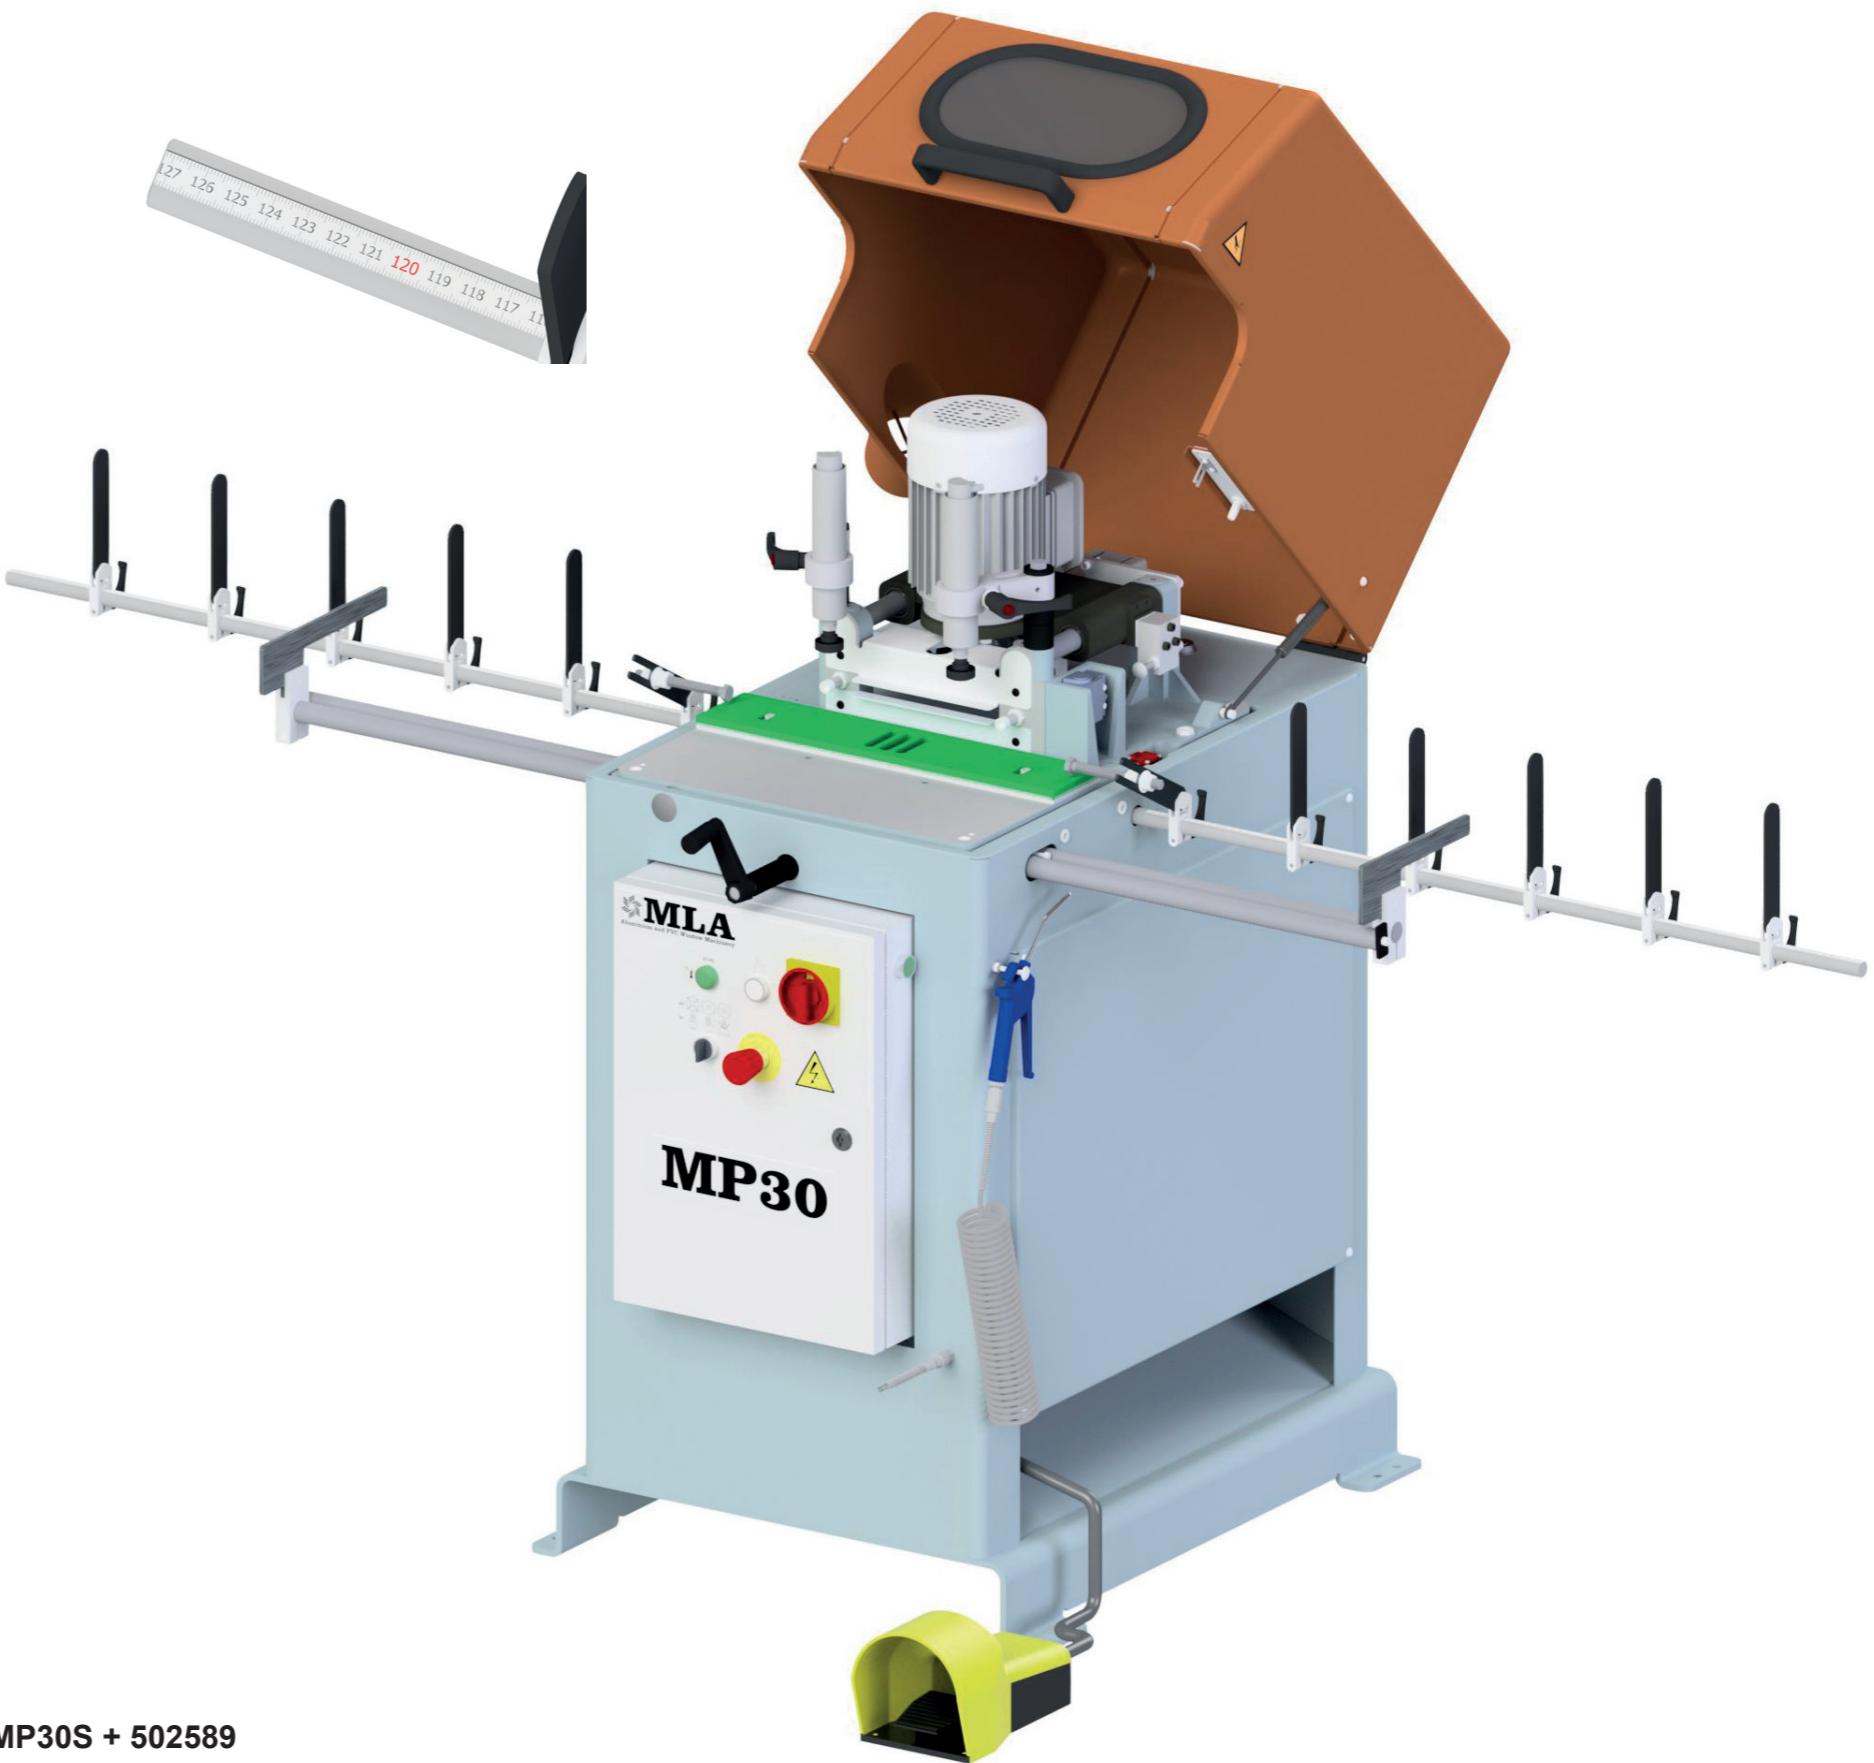

MP30S + 502589