



## Table saw TS 161/20

- > Fast and accurate cutting cycles are achieved by the short upward saw stroke
- > Wide angle cutting range. Up to 45° to the left and up to 0° to the right
- > The special pivoting mechanism with integrated round table enables working from the front at any angle position
- > The back fence is adjustable to allow the most effective use of the saw blade capacity for wide and flat profiles
- > Manual upward saw stroke
- > Manual material clamping (vertical)
- > Standard equipped with saw blade and machine base

### Technical information

- > Cutting capacity see cutting diagram
- > Saw blade diameter 280 mm
- > Spindle speed 3200 r.p.m.
- > Power supply 230/400 V, 3~, 50 Hz
- > Power output 1.05 kW
- > Length 650 mm, width 750 mm, height 1300 mm, weight 130 kg



TS 161/20

TS 161/21

## Table saw TS 161/21

- > See TS 161/20, however:
- > Pneumatic material clamping (vertical)
- > Pulsed coolant system
- > Air filter, regulator

### Optional


- > Digital readout for pivoting angles
- > Extraction system
- > Length stop and measuring systems
- > Roller conveyors
- > Saw blades
- > High performance cutting fluid



TS 161/30

## Table saw TS 161/30

- > See TS 161/21, however:
- > Pneumatic sawing feed
- > Safety hood
- > Length 650 mm, width 750 mm, height 1300 mm, weight 170 kg

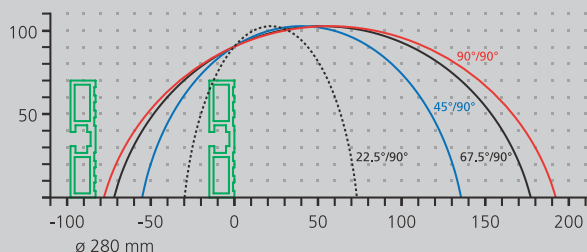

For further information please contact:

- > elumatec GmbH | Pinacher Straße 61 | D 75417 Mühlacker
- > Tel. +49 (0)7041 14-266 | Fax +49 (0)7041 14-282 | sales@elumatec.de

The right to make alterations is reserved

