




Lock cut-out on aluminium profile

6+6 foldaway stops on the lateral supports in 3 available lengths: 1-2-2,5m.



Code 104300+502482




The Company reserves the right to amend and improve its products without notice.

## Copy router for aluminium and pvc profiles

Conceived to carry out a wide range of milling operations on doors and windows profiles (see examples on the reverse). The effective clamping system, whose clamps are as wide as the working table, and the professional tools make the machining of the profile completely vibration free and enable to perform passing operations up to 110mm.

Linear rail guides (A, axis x and y) are fixed on a strong cast iron support (B), which enables the operator to work in a very stable way and without vibrations.

Wide range of copy templates and counter shapes meant for different kinds of profile.

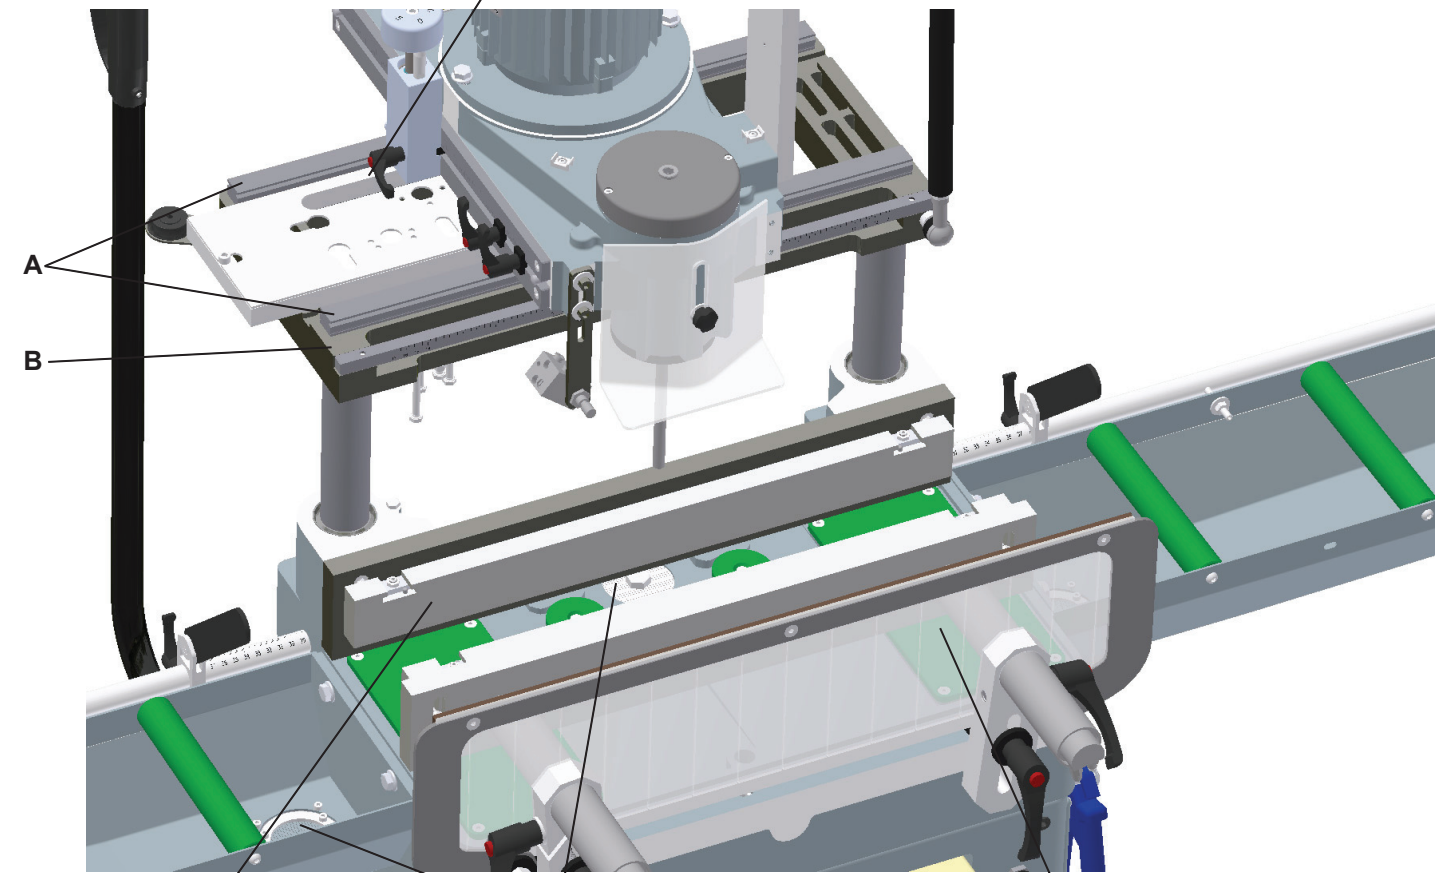

The main feature of the clamping system is represented by customized counter shapes that firmly secure the profile to the working table without any vibrations. The counter shape change is extremely fast thanks to the easy reverse system.

Coolant recovery openings filter the liquid and convey it back to the tank.

Plastic strips avoid the coolant dripping on the outside: the liquid is conveyed back onto the working table and then into the coolant recovery system.

Vertical descent stop button:  
only the right lever must be  
handled while milling.

Push button of the 3-diameter  
pneumatic copy pin (5-8-10)

Revolver with 8 stop devices  
of the vertical descent

Mist sprayer to work aluminium profiles.  
The system is set in motion at the start  
of the motor.

Variator of the motor rotation speed: you can choose the perfect  
speed according to material and tool.  
Different types of tool are supplied for different kinds of work.  
The motor is equipped with a thermic feeler that stops the  
electric feeding in case of overheating, protecting the integrity of  
the motor itself.

**Functioning:**

- 1) The profile is clamped at low pressure;
- 2) By pushing simultaneously the pneumatic buttons on the handles of the right and left levers, the high pressure clamping, the mist sprayer and the vertical motor are activated.  
The bimanual control device is certified (EN574-3A).

